

Spill Containment

Retrofit

OPW 500/700


No excavation required - use existing riser pipe

Eliminates all OPW primary and secondary containers

Diamond plate steel lid bolts to existing OPW rim; optional 24" gasket available for sealing the diamond plate


Includes: 24" diamond plate, ductile iron rim, cast iron lid with triple wiper seal, thread-on polyethylene secondary, 5 gallon stainless steel (or poly), primary with EZ-Gage; stainless steel fitting

Full Emco Wheaton warranty

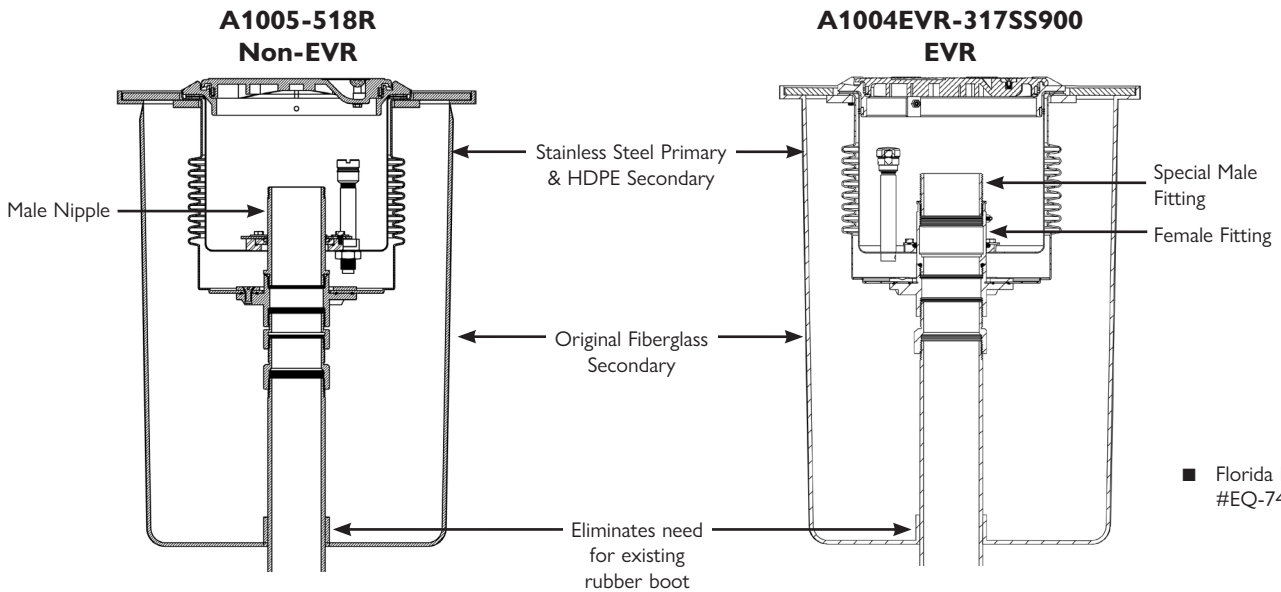

A0081-001R Lid Wrench

Special assembly tool facilitates one hour installation



Lid and rim available powder coated to API color specifications

Model Number	Description	Lbs.
A1004EVR-317SS800	5 gal primary stainless steel slip-on, secondary poly thread-on, no drain, rim seal	114
A1004EVR-317SS900	5 gal primary stainless steel slip-on, secondary poly thread-on, no drain	113
A1004EVR-317SM900	5 gal primary stainless steel slip-on, secondary poly thread-on, no drain, sensor	115
A1005-518R	5 gal primary stainless steel slip-on, secondary poly thread-on, male nipple, no drain	116
A1005-518RS	5 gal primary stainless steel slip-on, secondary poly thread-on, male nipple, no drain, rim seal	117
A1005-518R-CM	5 gal primary stainless steel slip-on, secondary poly thread-on, male nipple, no drain, sensor	118

Accessories

A0081-001R Wrench for 24" diamond plate
571964 Seal for diamond plate