

## 493820 Drain Wrench

The 493820 Drain Wrench is used for installation and removal of the Emco Wheaton A1004EVR Spill Containment drain valves.



## 494240 Adapter Torque Wrench

The 494240 is used to verify the static torque of the swivel adapter in accordance to CARB Test Procedure TP.201.1B



## 566675 Drill Fixture

The 566675 Drill Fixture is used to accurately drill the rivet holes on the top drop tube for the Emco Wheaton A1100EVR collar assembly.



## A0081-004CL Cam-Lock Wrench

The A0081-004CL Cam-Lock Wrench is used to install and remove the A0716 Composite Manhole cam-lock lids.




## A0081-1100 A1100 Testing Tool

The A0081-1100 Testing Tool is used to quickly and easily test the A1100-T series Testable Overfill Prevention Valve, without removing the valve from the riser.



## A0081 Test Cover

The A0081 Test Cover is used with the Emco A1004-210TEST to perform vacuum testing on spill containment.

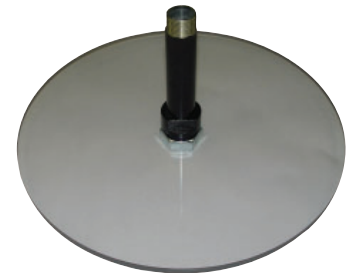

Part No.	Spill Containment	Diameter	Lbs.
A0081-12TEST	A1005-505 Series	12.40"	4.5
A0081-13TEST	A1004-316/517 Series	13.13"	4.5
A0081-15TEST	A1004-210 Series	15.25"	4.7
A0081-17TEST	A1004-215 Series, A1005-505CP	17.38"	5.0

## A0099-001TEST Vapor Test Cap

The A0099-001TEST Vapor Test Cap is used when performing a pressure decay test. The cap incorporates the same features as the A0099-002 Vapor Cap. The extended tube underneath the cap opens the poppet on the vapor adapter. Pressure is injected through the Schrader valve, and a gauge can be connected to the barbed fitting.



## A1004-210TEST Vacuum Apparatus w/Test Adapter

The A1004-210TEST is designed to perform vacuum testing on interstitial space in double wall spill containment. 5 lbs.


Model No.	Description
A1004-210TEST	Vacuum Test Apparatus
494343	Test Adapter
569143	Test Cap Assembly
569194	Air Switch 1/8"
569195	Air Regulator 1/8"



494343  
Test Adapter



569143  
Test Cap

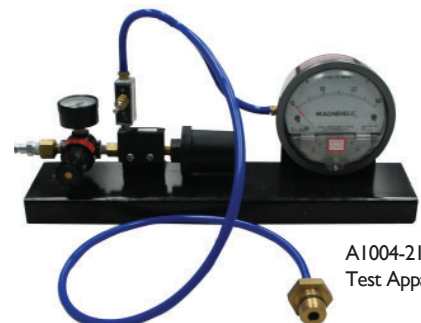

A1004-210TEST  
Test Apparatus