



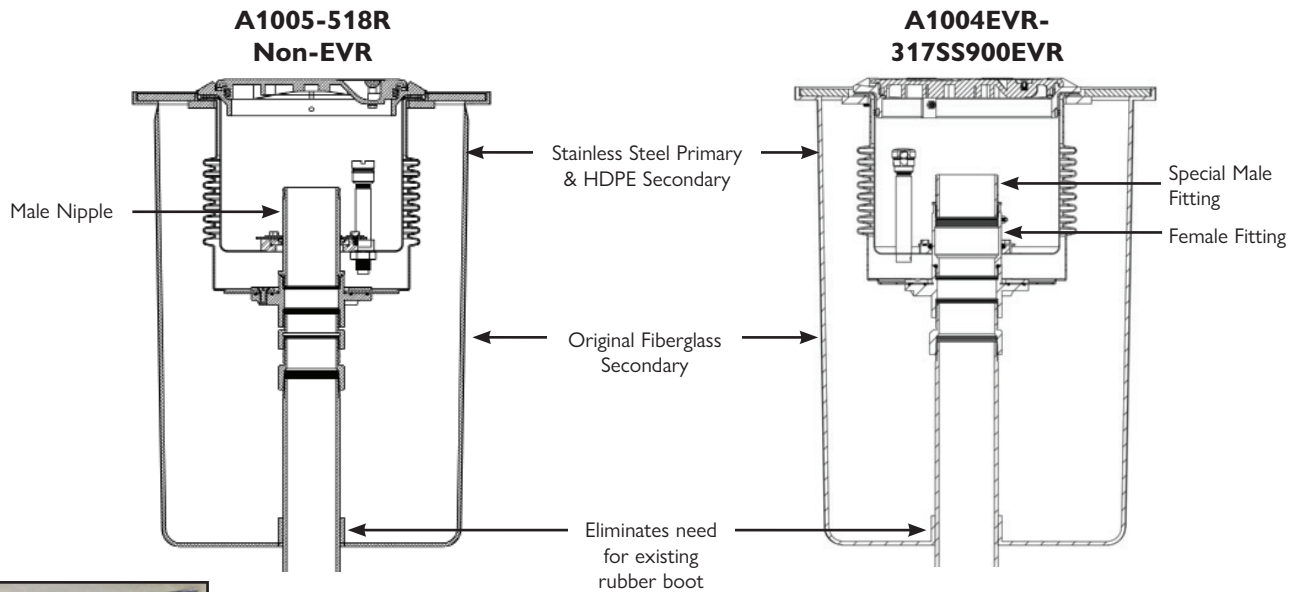

# A1004EVR/A1005 RETROFIT SPILL CONTAINMENT

## Repairs OPW 500/700 Buckets



**A0081-001R  
Lid Wrench**

Special assembly tool  
facilitates 1-hour  
installation



Lid and rim available  
powder coated to API  
color specifications

- No excavation required - use existing riser pipe
- Eliminates all OPW primary and secondary containers
- Diamond plate steel lid bolts to existing OPW rim; optional 24" gasket available for sealing the diamond plate
- Includes: 24" diamond plate, ductile iron rim, cast iron lid with triple wiper seal, thread-on polyethylene secondary, 5 gallon stainless steel primary with EZ-Gage, stainless steel fitting
- Full Emco Wheaton warranty

Florida DEP  
#EQ-741

Part Number	Description	Lbs.
A1004EVR-317SS800	5 gal primary stainless steel slip-on, secondary poly thread-on, no drain, rim seal	114
A1004EVR-317SS900	5 gal primary stainless steel slip-on, secondary poly thread-on, no drain	113
A1004EVR-317SM900	5 gal primary stainless steel slip-on, secondary poly thread-on, no drain, sensor	115
A1005-518R	5 gal primary stainless steel slip-on, secondary poly thread-on, male nipple, no drain	116
A1005-518RS	5 gal primary stainless steel slip-on, secondary poly thread-on, male nipple, no drain, rim seal	117
A1005-518R-CM	5 gal primary stainless steel slip-on, secondary poly thread-on, male nipple, no drain, sensor	118

### Accessories

A0081-001R Wrench for 24" diamond plate  
571964 Seal for diamond plate

© 2018 Emco Wheaton Retail Corporation

### Emco Wheaton Retail Corporation

2300 Industrial Park Drive • Wilson, North Carolina 27893 • 252-243-0150 • 252-243-4603 (fax) • www.emcoretail.com

S-1013  
09/18