


NEVER FACE CORROSION AGAIN



Stainless steel rim and primary. Water resistant composite lid color coded with API standards and DEF ID tag.

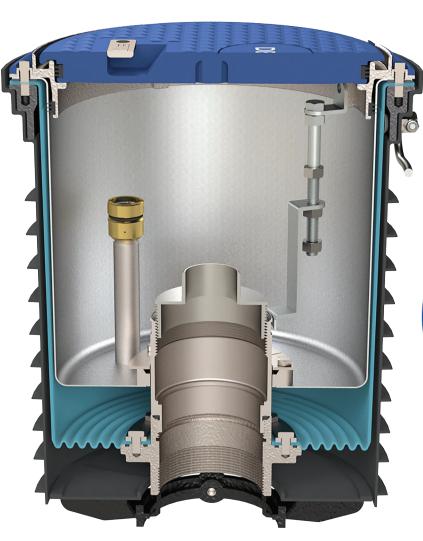

Stainless Steel fitting converts existing 4-inch NPT Male to 2-inch NPT Male

Not required for A1005-518GP2DEF



A0031-300SS2NPT



A7901-300SS2NPT Stainless steel fitting converts existing 4" NPT Female to 2" NPT Male treads

Engineering Customer Satisfaction™



DEF SPILL CONTAINMENT

Single Wall



Slip On

Standard Description:

Single Wall Spill Container, Replaceable, Slip On, Stainless Primary, No Drain, Riser Lock, [Blue/DEF]

MODEL NO.	DESCRIPTION
A1005-517AW-DEF	As above, with Stainless Rim and Composite Lid
A1005-517AW-CDEF	As above, with Cast Rim and Lid



Thread On

Standard Description:

Single Wall Spill Container, Replaceable, Thread On, Stainless Primary, No Drain, Stainless Base, Riser Lock, [Blue/DEF] *NOT Height Adjustable

MODEL NO.	DESCRIPTION
A1005-518AW-DEF	As above, with Stainless Rim and Composite Lid
A1005-518AW-CDEF	As above, with Cast Rim and Lid

Double Wall



Slip On

Standard Description:

Double Wall Spill Container, Replaceable, Slip On, Stainless Primary/ Stainless Secondary, No Drain, Screw on EZ Gage, Grounding Hardware, Riser Lock, [Blue/DEF]

MODEL NO.	DESCRIPTION
A1005-517G-DEF	As above, with Stainless Rim and Composite Lid
A1005-517G-CDEF	As above, with Cast Rim and Lid



Thread On Standard Description:

5 Gallon Double Wall Spill Container, Replaceable, Stainless Primary/Poly Secndary, No Drain, Stainless Rim, Composite Lid, Stainless Thread-on Base, Stainless Flange Adapter, Stainless 4"x4" Pipe Nipple, Screw-on EZ Gage, Riser Lock, [Blue/DEF]

MODEL NO.	DESCRIPTION
A1005-518GP4DEF	As above, with Stainless Rim and Composite Lid
A1005-518GP4-CDEF	As above, with Cast Rim and Lid



Thread On Standard Description:

Double Wall Spill Container, Replaceable, Thread On, Stainless Primary/Poly Secondary, No Drain, Stainless Base, Stainless 2" NPT Flange Adapter, Screw on EZ Gage, Riser Lock, [Blue/DEF]

MODEL NO.	DESCRIPTION
A1005-518GP2DEF	As above, with Stainless Rim and Composite Lid
A1005-518GP2-CDEF	As above, with Cast Rim and Lid

*Stainless rims not recommended for locations subject to high snow-plow traffic