
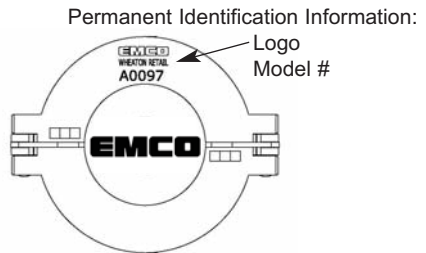


INSTALLATION INSTRUCTIONS

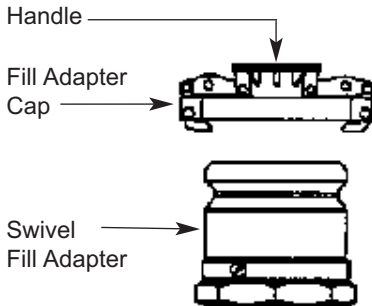

1. Locate the fill adapter cap over the swivel fill adapter and lock into place by pressing down on the handle.

PREVENTIVE MAINTENANCE

1. Annually verify that the gasket seal is properly secured and free of tears. If the fill adapter cap fails to comply, replace with new.

PERFORMANCE SPECIFICATIONS

This component was factory tested to, and met, the following specifications.

1. Meets ARB Cam and Groove Specifications.

IMPORTANT: Leave these installation instructions, product warranty registration card and the warranty tag with the station owner and/or operator.

Emco Wheaton Retail Corp.

2300 Industrial Park Dr. • Wilson, NC 27893
252-243-0150 • 252-243-4759 (fax)

p/n 568391
Rev. J, 06/13