
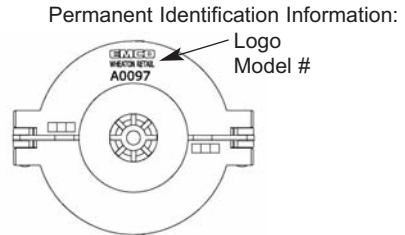


INSTALLATION INSTRUCTIONS

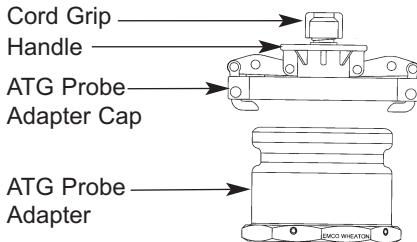

1. Two sizes of cord grip fittings are supplied. One size is .125"-.375" and the other size is .190"-.250". Choose the appropriate cord grip and screw into the top of the ATG probe adapter cap.
2. Feed the signal cable of the ATG probe through the bottom of the ATG probe adapter cap. Secure the signal cable by tightening the cord grip.
3. Locate the ATG probe adapter cap over the ATG probe adapter and lock into place by pressing down on the handle.

PREVENTIVE MAINTENANCE

1. Annually verify that the gasket seal is properly secured and free of tears. If the ATG probe adapter cap fails to comply, replace with new.

PERFORMANCE SPECIFICATIONS

This component was factory tested to, and met, the following specifications.

1. Meets ARB Cam and Groove Specifications.

IMPORTANT: Leave these installation instructions, product warranty registration card and the warranty tag with the station owner and/or operator.

Emco Wheaton Retail Corp.

2300 Industrial Park Dr. • Wilson, NC 27893
252-243-0150 • 252-243-4759 (fax)

p/n 568598
Rev. J 06/13