


Packing List:

- (1) Boot Face
- (4) Mounting Screws



A4005EVR
Balance Vapor Recovery Nozzle

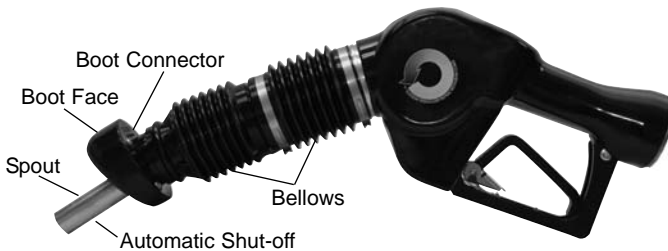

INSTALLATION INSTRUCTIONS

Service Tools Required:

- Philips Head Screw Driver w/ Fine Tip
- Bench Vise w/ 5" Jaw Width
- Gasoline Approved Container

CAUTION:

1. Always barricade work area to keep pedestrians and vehicles from accessing the dispenser.
2. Always use a gasoline approved container or test can when performing any type of preventive maintenance.
3. Before attempting to install, remove or service the A4005EVR nozzle, turn off and tag out power to the corresponding dispenser.
4. Before attempting to install, remove or service the A4005EVR nozzle, close the emergency impact valves located inside the base of the dispenser. Relieve the line pressure and standing fuel through the nozzle spout into a gasoline approved container by compressing the bellows and squeezing the lever.


IMPORTANT: Failure to perform cautions 3 and 4 may result in a hazardous gasoline spill, damage to equipment, personal injury and/or death.

Pre-Inspection:

1. Carefully unpack and remove all kitted parts from the shipping container and evaluate for any kind of damage. Verify that no parts are missing from the packing list before proceeding with the installation.

Pre-Installation:

2. Empty all standing fuel within the spout and bellows into a gasoline approved container before attempting to service the boot face.

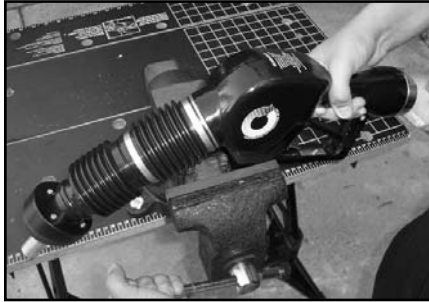

3. It is unnecessary to remove the A4005EVR nozzle from the fueling point during the removal and installation of the boot face. Use the bench vise to properly secure the A4005EVR nozzle during service.

Installation:

Removing the Existing Boot Face



4. Use the philips screw driver to remove the four mounting screws located on the back of the boot connector.



5. Remove the existing boot face by pulling out of the boot connector.

IMPORTANT: Properly discard all removed components.

Installing the New Boot Face



6. Install the new boot face into the boot connector by pressing evenly. Align the four mounting holes of the boot face with those of the boot connector.



7. Use the philips screw driver to install and tighten the four new mounting screws.
8. Remove the A4005EVR nozzle from the bench vise.

Post-Installation:

9. Place the A4005EVR nozzle back onto the dispenser cradle.

PREVENTIVE MAINTENANCE

1. Weekly inspect the boot face for tears, cuts and slits. Replace with factory authorized service kits.

<u>Part Number</u>	<u>Description</u>
492776EVR	Boot Face Kit

PERFORMANCE STANDARDS & SPECIFICATIONS

This component was factory tested to, and met the following specifications:

1. Meets ARB Material Compatibility with Fuel Blends as per Section 3.8 of CP-201.
2. Meets ARB Capable of Refueling Any Vehicle Standards as per Section 4.7.1 of CP-201.

IMPORTANT: Leave these installation instructions, product warranty registration card and the warranty tag with the station owner and/or operator.

Emco Wheaton Retail Corp.

2300 Industrial Park Dr. • Wilson, NC 27893
252-243-0150 • 252-243-4759 (fax)

p/n 570184
Rev. C, 03/13