A1004EVR-317SS100 Double Wall Stainless Steel Primary/Poly Secondary Spill Containment

Specifications

- Replaceable; easily repair or replace primary & secondary units from grade without breaking concrete
- 5 gal capacity
- Screw-on
- Weights: Lid: 15.9 lbs; Total: 68 lbs

Materials

- Cast iron rim
- Cast iron lid; water resistant with built-in handle, exclusive triple wiper seal and vent valve
- Stainless steel bolts & nitrile seals on primary flange

Application

- Grade level
- · Installs 16" on center

Components


- EZ-Gage to monitor interstitial space at a glance
- · Powder coated adapter fitting
- · SST male adapter coupling

Approvals

- Phase I EVR Executive Order VR-105
- ULC Listed MH21149
- FL DEP # EQ-741
- NC DENR
- MO DNR
- · Lid meets H20 Load Rating

Color Variant Part Numbers

Model No.	Rim/Lid	A0996 ID Tag
A1004EVR-317SS100	Black	
A1004EVR-317SS101	White	Regular
A1004EVR-317SS102	Red	Premium
A1004EVR-317SS103	Yellow	Diesel
A1004EVR-317SS104	Orange	Vapor
A1004EVR-317SS106	Bronze	E85
A1004EVR-317SS107	White	E0

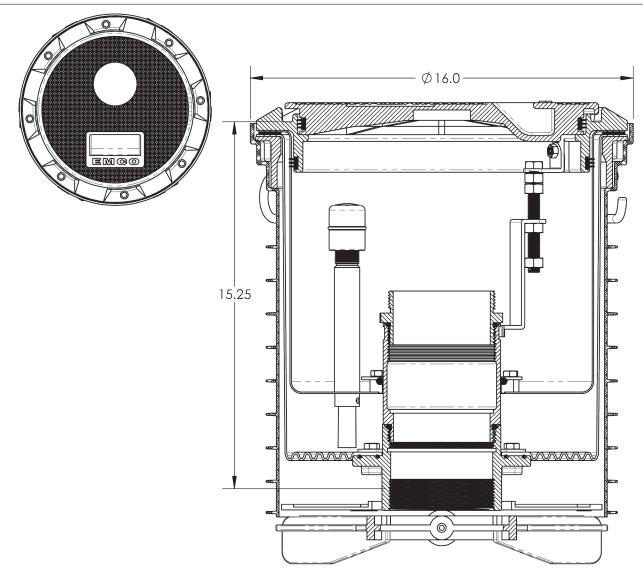

© 2019 Emco Wheaton Retail Corporation



EMCO WHEATON RETAIL CORP. 2300 INDUSTRIAL PARK DRIVE WILSON, N.C. 27893 emcoretail.com

DO NOT SCALE DRAWING-WORK TO DIMENSIONS SHOWN DIMENSIONS ARE IN INCHES (DIMENSIONS IN BRACKETS ARE IN MILLIMETERS)

UNLESS OTHERWISE SPECIFIED

DECIMALS
.X ± .030 .XX ± .015 .XXX ± .005 ± 1°

CASTING TOLERANCES TO INDUSTRY STANDARDS
MACHINED SURFACES 125 RMS REMOVE ALL BURRS

THE INFORMATION AND DESIGN DISCLOSED BY AND THE COPYRIGHT IN THIS DRAWING ARE THE PROPERTY OF EMCO WHEATON RETAIL CORP. AND CANNOT BE USED WITHOUT WRITTEN PERMISSION. PART DESCRIPTION

5GAL DW, EVR, REPLACEABLE, 16" CENTER, NPT, N/DRN, SST PRI/POLY SEC, SST FLANGE ADAPTER, CAST IRON LID/RIM. SST CLOSE ADAPTER

MACHINED SURFACES 125 RMS REMOVE ALL BURRS		MUTHOLITAN	WITHOUT WRITTEN PERMISSION.						
		RS VVITHOUT VVI			DRAWING NUMBER.	PAGE	REV.		
DRAWN BY	DATE	USED ON	CASTING NUMBER			4 /4		1	
СМВ	3/16/20	-	=	A	A1004EVR-317SS100	1/1	Α		