# A1004EVR-317SS140 Double Wall Stainless Steel Primary/Poly Secondary Spill Containment

# **Specifications**

- Replaceable; easily repair or replace primary & secondary units from grade without breaking concrete
- 5 gal capacity
- · Screw-on
- · Weights: Lid: 15.9 lbs; Total: 76 lbs

#### **Materials**

- · Cast iron rim
- Cast iron lid; water resistant with built-in handle, exclusive triple wiper seal and vent valve
- Stainless steel bolts & nitrile seals on primary flange

### Application

- · Grade level
- Installs 16" on center

## Components


- · EZ-Gage to monitor interstitial space at a glance
- · Powder coated adapter fitting
- · SST male adapter coupling
- A0076-124S Vapor Swivel Adapter
- · A0099-002 Vapor Cap

#### **Approvals**

- Phase I EVR Executive Order VR-105
- ULC Listed MH21149
- FL DEP # EQ-741
- NC DENR
- MO DNR
- · Lid meets H20 Load Rating

#### **Color Variant Part Numbers**

Model No.	Rim/Lid	A0996 ID Tag
A1004EVR-317SS140	Black	
A1004EVR-317SS144	Orange	Vapor

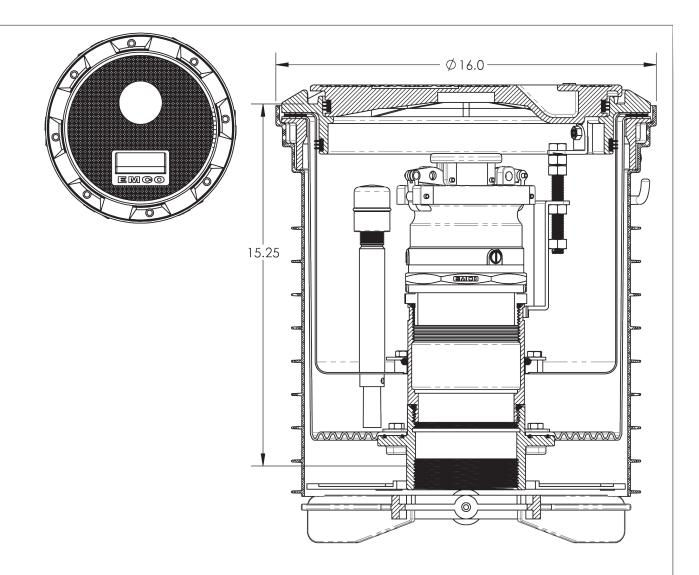

2019 Emco Wheaton Retail Corporation



EMCO WHEATON RETAIL CORP. 2300 INDUSTRIAL PARK DRIVE WILSON, N.C. 27893 emcoretail.com

# DO NOT SCALE DRAWING-WORK TO DIMENSIONS SHOWN DIMENSIONS ARE IN INCHES (DIMENSIONS IN BRACKETS ARE IN MILLIMETERS)

DECIMALS ANGLES .X± .030 .XX ± .015 .XXX ± .005 ± 1° .CASTING TOLERANCES TO INDUSTRY STANDARDS MACHINED SURFACES 125 RMS REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

THE INFORMATION AND DESIGN DISCLOSED BY AND THE COPYRIGHT IN THIS DRAWING ARE THE PROPERTY OF EMCO WHEATON RETAIL CORP. AND CANNOT BE USED SGAL DW, EVR, REPLACEABLE, 16" CENTER, NPT, N/DRN, SST PRI/POLY SEC, SST FLANGE ADAPTER, CAST IRON LID/RIM, SST CLOSE ADAPTER, VAPOR ADAPTER /CAP

MACHINED SURFACES 125 RMS REMOVE ALL BURRS VITHOUT VIRITIEN PERIVISSION		RITTEN PERIVISSION.	SIZE	DRAWING NUMBER.	PAGE	REV.		
DRAWN BY	DATE	USED ON	CASTING NUMBER					
СМВ	3/16/20	-	-	A	A1004EVR-317SS140	1/1	A	