

# SafeBreaks®

## Standard Shear Pin


### A2119 3/4" SafeBreak®

### A3019 1" SafeBreak®

The Emco Wheaton A2119 and A3019 Standard SafeBreaks® have an economical shear pin design with 3/4" (A2119) and 1" (A3019) connections for standard applications. The double poppets seal both hoses upon separation.

#### Material

Body: Aluminum  
 O-rings & Seals: Buna-N & Viton®  
 Protective Cover: Plastic  
 Viton® is a registered trademark of The Chemours Company

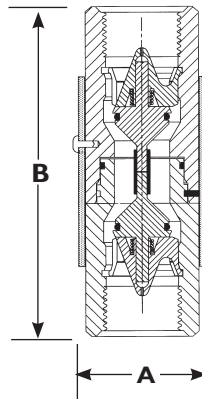

- UL Listed MH17833  
 ETL 536786  
 ATEX (A2119-002) FTZU07ATEX0240

Model No.	Description	A	B	Lbs.
A2119-002	3/4" Shear Pin NPT	1.6"	4.2"	0.4
A2119-003	3/4" Shear Pin BSPP	1.6"	4.2"	0.4
A3019-001	1" Shear Pin NPT	2.0"	6.3"	1.0
A3019-003	1" Shear Pin BSPP	2.0"	6.3"	1.0

## Standard Reconnect


### A2219 3/4" SafeBreak®

### A3219 1" SafeBreak®

The Emco Wheaton A2219 and A3219 Standard SafeBreaks® allow for immediate return to service after a drive-away, with no repair kit required. This is made possible by a unique, reconnectable design. The double poppets seal both hoses upon separation.

#### Material

Body: Aluminum  
 O-rings & Seals: Buna-N & Viton®  
 Protective Cover: Plastic  
 Viton® is a registered trademark of The Chemours Company

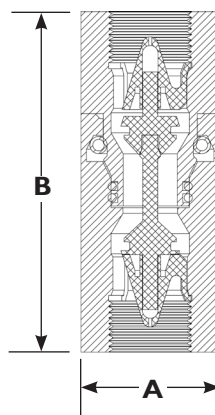

- UL Listed MH17833

Model No.	Description	A	B	Lbs.
A2219-002	3/4" Reconnectable NPT	2.0"	4.2"	0.8
A3219-001	1" Reconnectable NPT	2.0"	6.3"	1.0